

J200 Cartridge Electric Pump

P200 can be used in single-line lubrication system. The motor drives the pump to make reciprocating linear motion, delivers grease to the outlet, and reaches the lubrication point through the pressurized distributor. When the set pressure is reached, the motor stops working and the pressure relief valve starts working to release the system pressure and complete a cycle.


The maximum pressure of the J200 system is 8MPa, the shortest lubrication interval is 5 minutes, and the maximum main line length is 15 meters. It is suitable for the lubrication of small and medium-sized equipment indoors with lubricant NLIG 000~1#.



Specification

Voltage	Output volume	Pressure	Abnormal	Level switch	Stop signal	IP-protection	Certification
24VDC, 1.0A	7mL/min	5 or 8MPa	24VDC, 1.0A	N.C.	N.C.	IP54	CE

Dimension

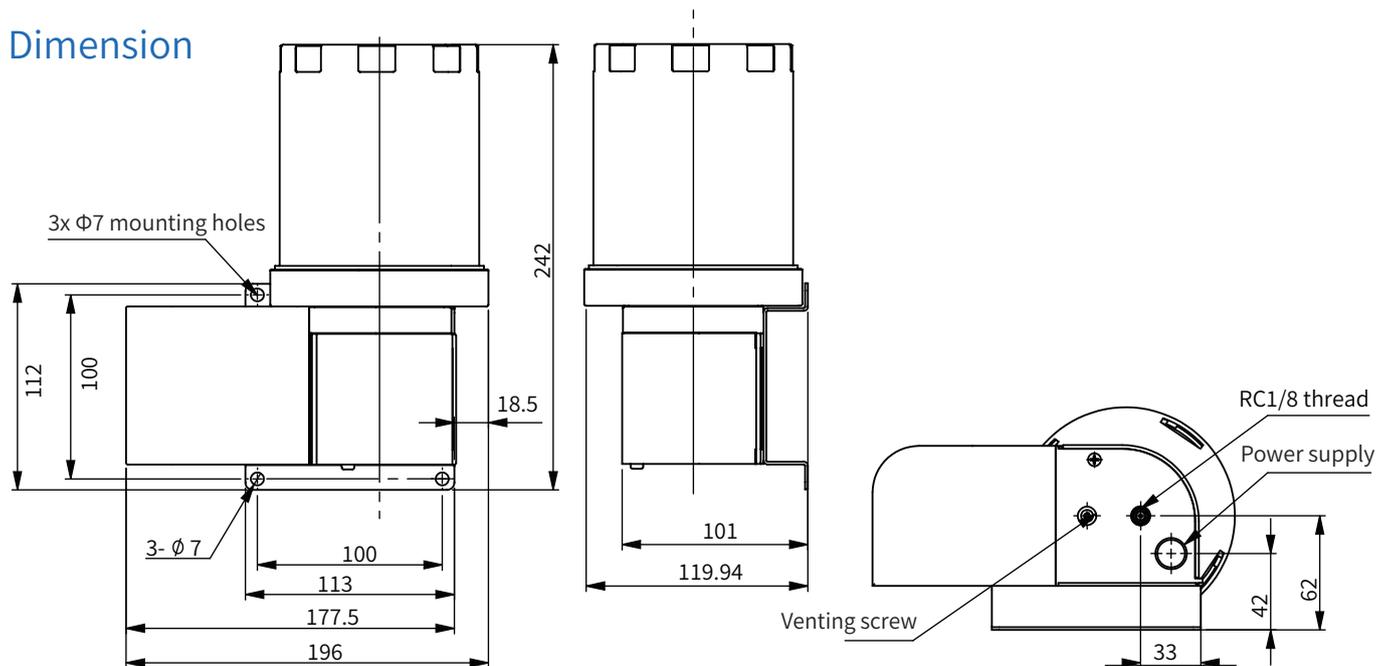

Single-line System

