

KVT Manual Pull Rod Grease Gun

Feature

Grease gun is equipped with an industrial oil seal that does not leak oil. The large piston and single double piston design provide high pressure and fast discharge.

The gun head is cast as a whole and can withstand max 60MPa working pressure.

It is equipped with a thick spring, and industrial heat treatment ensures that it is not easily deformed or aged.

Grease gun adopts a textured rubber sleeve design, which effectively prevents slipping and wear.

It has a wide range of applications, such as lubrication for agricultural machinery, engineering machinery, automotive and ship equipment, and light and heavy machinery equipment.



Pointed Flat Steel Hose Suction plate

56

425

Name: KVT601
 Piston: bold single piston
 Piston: 8mm diameter
 Capacity: 600mL
 Size: 56mm wide, 425mm long

10mm




Pointed Flat Steel Hose Suction plate

56

425

Name: KVT602
 Piston: bold double piston
 Piston: 8mm diameter
 Capacity: 600mL
 Size: 56mm wide, 425mm long

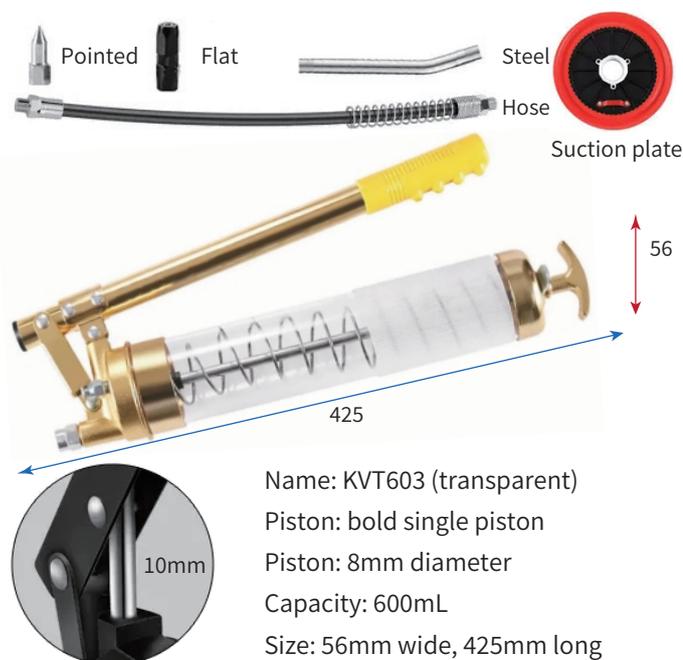

Pointed Flat Steel Hose Suction plate

56

425

Name: KVT603 (transparent)
 Piston: bold single piston
 Piston: 8mm diameter
 Capacity: 600mL
 Size: 56mm wide, 425mm long

10mm



Pointed Flat Steel Hose Suction plate

56

425

Name: KVT604 (transparent)
 Piston: bold double piston
 Piston: 8mm diameter
 Capacity: 600mL
 Size: 56mm wide, 425mm long