


JGH3 Pressure-relief Manual Grease pump

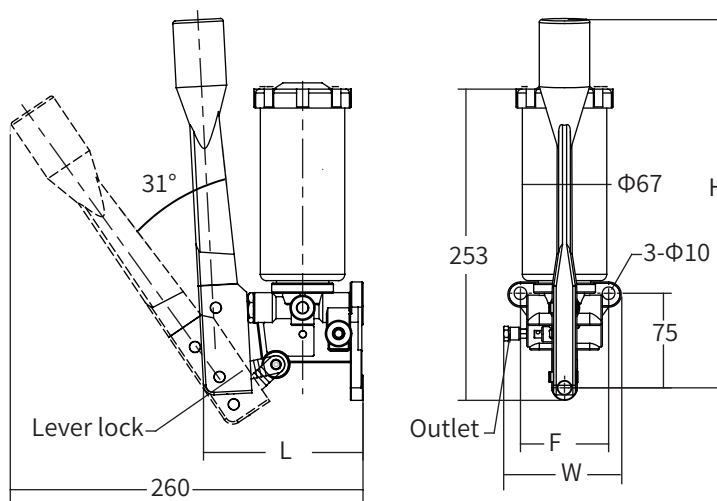

Feature

1. Pull the handle to discharge the lubricant, easy to operate.
2. The oil block has good tightness, and the lubricant will not remain in the reservoir.
3. Outlet can be set on the left or right side of the handle as required, and the oil can also be discharged from both sides.
4. EGH3 is a pressure relief hand pump. After the pressure reaches the rated value, be sure to return the handle to the locked position to release the system pressure.
5. Suitable for mechanical equipment with irregular lubrication, such as punching machines, woodworking machines, etc.

Specification

Output	Max. 2mL/cyc
Pressure	100 bar
Outlet ia	Φ4, 6, 8, PT1/8
Lubricant	NLGI 000~0#

Dimension

Model	Reservoir	Holes F(mm)	Length L(mm)	Width W(mm)	Height H(mm)	N.W (kg)
JGH3-3	300mL	70x75	134	95	315	1.1
JGH3-8	800mL	70x75	134	95	325	1.2

Order Code

JGH3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Reservoir	Outlet	Outlet fittings	Outlet dia.
	3 = 300mL	L = Left outlet	D = Straight connector	0 = Φ4
	8 = 800mL	R = Right outlet	H = Elbow connector	1 = Φ6
		D = Dual outlet		2 = Φ4(with pressure gauge)
				3 = Φ6(with pressure gauge)
				4 = Φ8
				5 = Φ8(with pressure gauge)
				6 = PT1/8
				7 = PT1/8(with pressure gauge)

Accessories



JGK distributor



Outlet connector



Elbow



Tubing connector



High pressure hose



Copper tube



Bender



Filling machine