

VSKH-KR Dual-line Distributor (40MPa)

Feature

VSKH-KR dual line distributor has outlets on both the upper and lower sides. When the distributor piston moves in both directions, grease is discharged from the upper and lower outlets respectively. Observe the working condition of distributor from action of the indicator rod, and adjust the discharge within the specified range by adjusting the screw.

VSKH-KR is suitable for 40 MPa dual line grease centralized lubrication system. Its piston action is controlled by alternating oil supply pressure from two main lubrication lines, which quantitatively distribute grease to lubrication points.




Specification

Model	Nominal pressure	Action pressure	Rated output	Adjusting screw
VSKH-KR	40 MPa	≤1.5MPa	0 ~ 1.5mL/cyc	0.05mL/circle

Compatible with NLGI 0 #~2 # greases or oils with viscosity grades greater than N68, with an operating temperature range of -10 °C~80 °C. If using oil as the medium, please use it under a pressure of 20MPa.

Dimension

Model	VSKH2-KR	VSKH4-KR	VSKH6-KR	VSKH8-KR
L1	52	80	108	136
L2	36	64	92	120
N.W kg	1.5	2.0	2.7	3.3

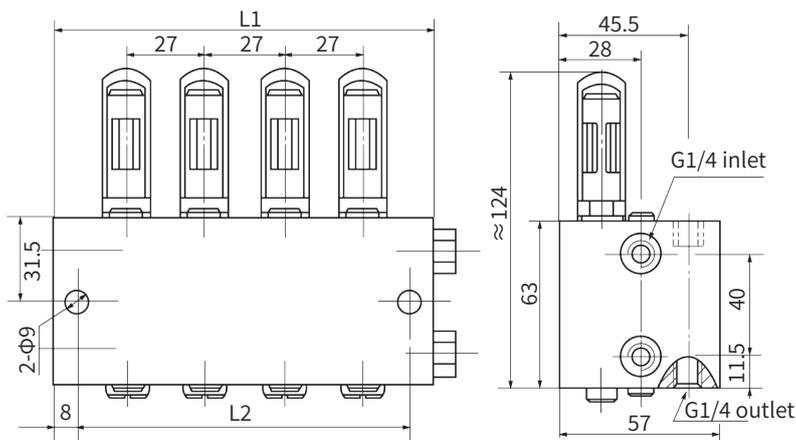

Order Code

VSKH 8 KR F

- F = Fluororubber seal, N = NBR rubber seal
- KR = With pointer adjustment device
- Number of outlets 2~8

Note

Distributors installed and used in environments with temperatures outside the range of -10 °C to 80 °C must be specified before ordering in order to provide low and high temperature resistant oil seals.