

## JDY-50S High Pressure Grease Injector

The pump suction port is equipped with a filter screen to prevent impurities from entering the pump body. Polyurethane oil seals are used, which have stronger wear resistance and are designed for high viscosity grease. The inlet of the pump is equipped with a dual cup oil-water separator(air filter), and the pump is suitable for use with non corrosive oil products. Lubricant: Lithium based grease NLGI 00 #~3 # and high-temperature resistant special grease.



### Universal Grease Gun

Model: JDY-01 (without hose)

Gun head: pointed

Flow rate: 10L/min

Pressure: 60MPa

Weight: 2kg

Packaging: 250 \* 140 \* 60mm

### JDY-50S Specs

Pressure ratio	80: 1
Max pressure	80MPa
Max flow rate	600-900g/min
Lubricant	NLGI 00# ~ 3#
Pressure range	0.5-0.9MPa
Temperature	80°C
Conveying head	80m
Tubing length	10m/15m
Grease filling	15-20kg barreled
Weight	15kg
Packaging	800*400*400mm

### JDY-50(without pulley)



### JDY10038 Pump Head



## High Pressure Hose Reel



Automatic telescopic open type




Automatic telescopic closed type



4 meters long = JDY-HS-4  
 10 meters long = JDY-HS-10  
 15 meters long = JDY-HS-15

Model	JDY-HR15 open type (JDY-HR10)	JDY-HR15C closed type (JDY-HR10C)
Hose specs	13mm*6mm (JDY-HS-X, X = length/m)	13mm*6mm (JDY-HS-X, X = length/m)
Max flow rate	10L/min	10L/min
Max pressure	32MPa	32MPa
Outlet	Internal thread M14*1	Internal thread M14*1
Hose length	15m (10m)	15m (10m)
Weight	17kg (15kg)	17kg (15kg)
Packing	400*350*220mm	410*400*250mm

## Direction Adjustment

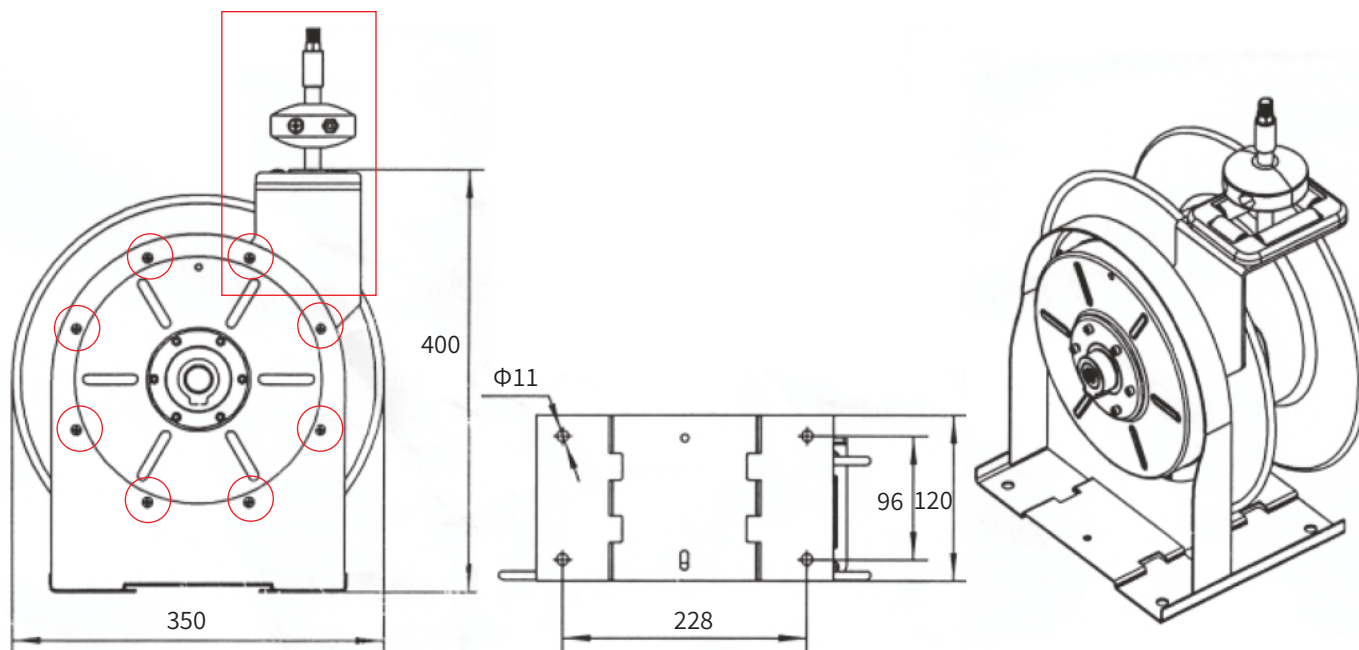

If you want to adjust the parts on the reel, the ones in the red rectangle, you need to remove all the screws in the red circle, then you can adjust the direction of the parts.