




JOM Pneumatic Oil-mist Pump

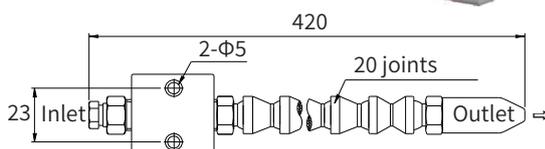

JOM-4

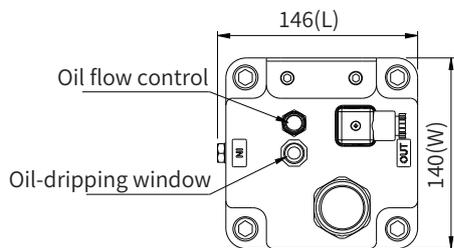

OE spray gun

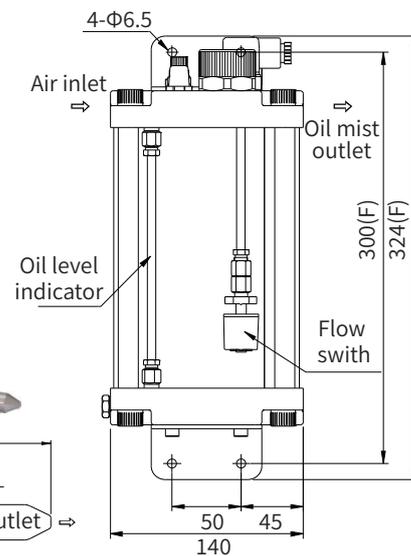

Dimension JOM

Specification

Model	Air inlet	Outlet	Pressure	Temp.	Capacity	Mounting (F)	Length(L)	Width(W)	Hight(H)	N.W
JOM	PT/4	PT/4	Max 15bar	5°C~60°C	2L	275mm	160mm	140mm	305mm	5kg
					4L	298mm	205mm	185mm	323mm	8kg
					5.5L	373mm	205mm	185mm	398mm	9.5kg

Feature

1. It is suitable for high-speed cutting lubrication, large-area lubrication, special processing lubrication and cooling.
2. The outlet of the pump can be equipped with various types of nozzles, suitable for a variety of cutting tools.
3. It is equipped with an oil volume adjustment knob, which can adjust the oil volume. Rotate the oil volume adjustment knob counterclockwise, the larger the air volume, the more oil mist volume. Clockwise rotation, the less oil mist.
4. The oil drop transparent window can observe whether the pump is normal, and the oil mirror can observe oil level.
5. The air pressure source of the pump can be directly driven with the air compressor, or the solenoid valve can be used to control the ON/OFF switching action of the air source.
6. The range of air pressure source is 4~8bar, and the atomization effect is the best.
7. Please use lubricating oil or cutting water with a viscosity range of 22-68cst@40°C, but it is forbidden to add volatile oil, such as ester, ethylene glycol-based oil.

Order code

