


J100 Electric Grease Pump

The J100 series pump system can lubricate up to 100 lubrication points, and the main line can be up to 15 meters long. It has a pressure relief valve to make it suitable for use in the lubrication system of a single-line pressurized distributor. The J100 is available in two versions, with reservoir or cartridge, with up to 2 lubricant outlets and can be equipped with level monitoring. Mainly used in automation, machine tools, material handling, plastic injection molding, etc. Working temperature 0~+50°C.

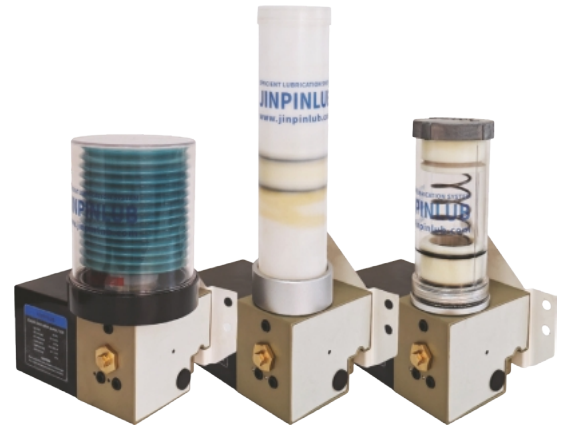

Specification

Voltage	Discharge	Pressure	Outlets	Cartridges	Reservoirs	Lubricants	Protection	Mounting	Certification
24VDC	15mL/min	Max 8MPa	1 or 2	0.7L	0.3L, 0.5L, 1.5L	NLGI 000~2#	IP65	Upright	CE

Order Code

J100 15 1 1 1

1 = 1 outlet; 2 = 2 outlets

1 = with controller; 0 = external controller

1 = Pressure-relief type; 0 = Progressive type

3R = 0.3L reservoir; 5R = 0.5L reservoir; 15R = 1.5L reservoir

3D = 0.3L detachable reservoir; 5D = 0.5L detachable reservoir

3C = 0.3L cartridge; 7C = 0.7L cartridge; 0C = 0.7L without cartridge

Dimension

Capacity	H	D
3R	229	78
5R	299	78
15R	320	116
3D	267	59
5D	356	59
3C	320	59
7C	258	118
0C	258	118

