


JGHP Manual Grease Pump

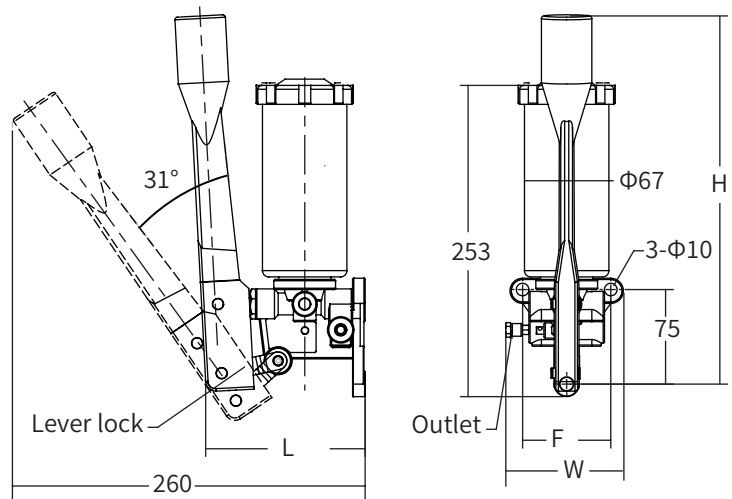

Feature

1. Pull the handle to deliver lubricant, easy to operate.
2. With good adhesion of the pressure oil block, grease will not remain.
3. Outlet can be set on the left or right side of the handle according to the demand, or it can be double-outlet.
4. JGHP with strong spring, suitable for NLGI 1~2# grease.
5. The grease must be injected from the grease nipple to avoid air and foreign matter.

Specification

Max output: 2mL/time
Max pressure: 10MPa
Outlet dia: Φ4, Φ6, Φ8, PT1/8
Lubricant: NLGI 1,2

Dimension

Model	Grease tank	Fixing hole F(mm)	Length L(mm)	Width W(mm)	Height H(mm)	Weight (kg)
JGHP-6	600mL	70x75	134	95	325	1.5

Order Code

JGHP	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Grease tank 6 = 600mL	Outlet type L = Left R = Right D = Double outlet	Outlet fitting D = Straight connector H = Elbow connector	Fitting dia 0 = Φ4 1 = Φ6 2 = Φ4 (with pressure gauge) 3 = Φ6 (with pressure gauge) 4 = Φ8 5 = Φ8 (with pressure gauge) 6 = PT1/8 7 = PT1/8 (with pressure gauge)

Matching Parts



JSV distributor



A distributor



B distributor



AB distributor



Tubing connectors



Grease injector



Hose



Copper tube