

Nylon Tube

Feature

Material: PA6 or PA11

Corrosion-resistant, aging-resistant, light, tough, easy to bend, easy to install, smooth surface, low friction coefficient. Applicable to hydraulic, lubrication pipelines and vehicle fuel pipelines.

Applicable temperature range is -40°C~80°C.



Copper Tube(15MPa)



Nylon Tube (3.5MPa)




Aluminum Tube (5MPa)

Specification

Model	Aluminum tube			Copper tube		
Outer dia d mm	Φ4	Φ6	Φ8	Φ4	Φ6	Φ8
Pressure Mpa	3.0	2.7	2.7	16	10	6.3
Mini radius mm	R20	R40	R40	R20	R30	R50
D	Φ4	Φ6	Φ8	Φ4	Φ6	Φ8
d	Φ2.5	Φ4	Φ6	Φ2.5	Φ4	Φ6
L	Custom made					

Dimensions

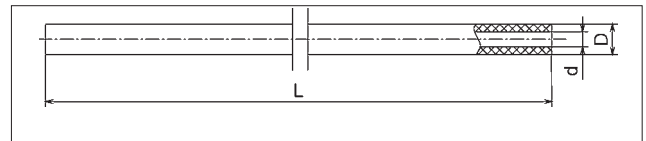

Order Code

NPA - 4 - 100(customized)

NPA	Nylon tube PA6
NPB	Nylon tube PA11
AP	Aluminum tube
ACP	Copper plated
CP	Copper tube

100	100 meters
200	200 meters

4	Outer dia Φ4
6	Outer dia Φ6
8	Outer dia Φ8
10	Outer dia Φ10
12	Outer dia Φ12

Spring Sheathed Hose

Feature

It is composed of PA11 pipe, pipe fittings, double cone ferrule and spring sleeve, etc. It is suitable for supplying oil to the moving parts of mechanical equipment and for occasions where chips need to be protected. The applicable temperature range is -40°C~80°C.

Specification

Model	NP-N4	NP-N6
Outer dia d1 mm	Φ4	Φ6
Pressure MPa	3.0	2.5
Mini bending radius MPa	R30	R40
D	M8 x 1	M10 x 1
d2	Φ6	Φ8
L mm	18	18
F mm	Custom made	

